

PRODUCT DATA

D-Series All-Fabric Diffuser DT200 Clip Face 24" X 24"

BENEFITS

- Provides low velocity dispersion pattern
- Provides both vertical and horizontal dispersion pattern
- Micro-perforated fabric face
- Clips face attachment for quick and easy install
- No metal back pan above the ceiling
- Great for congested above ceiling space
- Fabric diffusion panel
- Entire diffuser body and diffuser face is designed for room side removal
- Allows for entire diffuser body and diffuser face to be cleaned in the laundry



FEATURES


- Simple, clip face mounting frame installation
- Universal installation configurations (T-bar or finished ceiling)
- Lightweight shipping
- Easy maintenance
- Quiet
- Shallow 7in face depth and tapered ends
- Capable of air flow volumes up to 400 CFM (189 L/s)

OPTIONS

- Standard 24" x 24"
 - Custom sizes available
- Surround Flow (std.) or Select Flow
- Custom inlet size and position
- Silver, white, or custom color available



Panel Size		Inlet Diameter
Width (in)	Length (in)	(in)
24	24	12

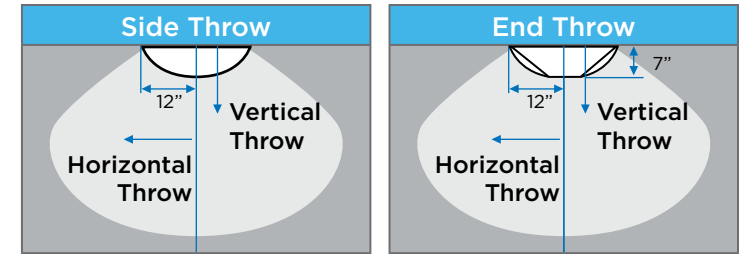

Throw distance (ft) is measured from the center of the device.

Fabric Type: DT200																																
Isothermal Airflow		Neck Velocity		Pt Total Pressure		Ps Static Pressure		NC Noise Criteria	SIDE						SIDE						END						END					
									Horizontal Throw fpm (m/s)						Vertical Throw fpm (m/s)						Horizontal Throw fpm (m/s)						Vertical Throw fpm (m/s)					
CFM (L/s)	fpm (m/s)	in w.g. (Pa)	in w.g. (Pa)						100 (0.51)	75 (0.38)	50 (0.25)	100 (0.51)	75 (0.38)	50 (0.25)	100 (0.51)	75 (0.38)	50 (0.25)	100 (0.51)	75 (0.38)	50 (0.25)	100 (0.51)	75 (0.38)	50 (0.25)	100 (0.51)	75 (0.38)	50 (0.25)	100 (0.51)	75 (0.38)	50 (0.25)			
175 (83)	223 (1.1)	0.036 (9.0)	0.033 (8.2)	< 20	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)			
250 (118)	318 (1.6)	0.069 (17.2)	0.063 (15.7)	< 20	- (-)	- (-)	0.6 (0.2)	- (-)	- (-)	- (-)	1.7 (0.6)	- (-)	- (-)	0.8 (0.3)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	- (-)	1.1 (0.4)	(0.4)			
325 (153)	414 (2.1)	0.112 (27.9)	0.101 (25.1)	< 20	0.6 (0.2)	0.8 (0.3)	0.9 (0.3)	1.1 (0.4)	1.6 (0.5)	2.4 (0.8)	- (-)	- (-)	1.1 (0.4)	2.5 (0.8)	- (-)	- (-)	1.3 (0.4)	>3.5 (>1.1)														
400 (189)	509 (2.6)	0.164 (40.8)	0.148 (36.8)	< 20	0.8 (0.3)	0.8 (0.3)	0.9 (0.3)	1.4 (0.5)	1.7 (0.6)	2.5 (0.8)	1.1 (0.4)	1.5 (0.5)	2.5 (0.8)	1.5 (0.5)	2.5 (0.8)	1.5 (0.5)	2.5 (0.8)	>3.5 (>1.1)														

*Table section above represents throw distance in ft (m)

SPECIFICATIONS

CODES:

- Classified by Underwriters Laboratories in accordance with the requirements of:
 - UL 723

AIRFLOW RANGE:

- 175 - 400 CFM (83 - 189 L/s)

FABRIC WEAVE:

- Fire Retardant Polyester

PERFORMANCE NOTES:

- Units were tested in accordance with ASHRAE Standard 70-1991 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Independent testing was performed to establish performance data. Test data was prepared by an independent ETL certified laboratory.
- Test data reflects performance of DuctSox DT200 fabric.
- Noise Criteria (NC) values based on a 10 dB room absorption. Actual values may vary depending on site conditions.
- Asterisk (-) indicated that the designated airflow velocity was not observed.

DuctSox Corporation
4343 Chavenelle Road
Dubuque, IA 52002

Phone: 563-588-5300
Toll-free: 866-382-8769
Fax: 563-588-5330

ductsox.com

DUCTSOX[®]
Redefining Air Dispersion