

### FABRIC

TufTex™ is a heavyweight, premium grade non-permeable polyester fabric. This heavy-duty fabric has a textured, aesthetically-attractive finish.

### FEATURES & BENEFITS


- Commonly used alternative to exposed single wall duct/diffusers
- No air is able to pass through the fabric weave
- Airflow is delivered through orifices and linear vents to achieve desired airflow
- Machine washable

### FABRIC SPECIFICATIONS

Weave: Fire Retardant Polyester | Plain Weave, Coated  
 Weight: 8.2 oz/yd<sup>2</sup> (278g/m<sup>2</sup>)  
 Porosity: 0.0 CFM/ft<sup>2</sup> @ 0.5" w.g. (0.0 L/s/m<sup>2</sup> @ 125 Pa)  
 Codes: Classified by Underwriters Laboratories in accordance with the requirements of:  
 • NFPA 90A • UL 2518 • UL-C (Canada)



### SHAPE

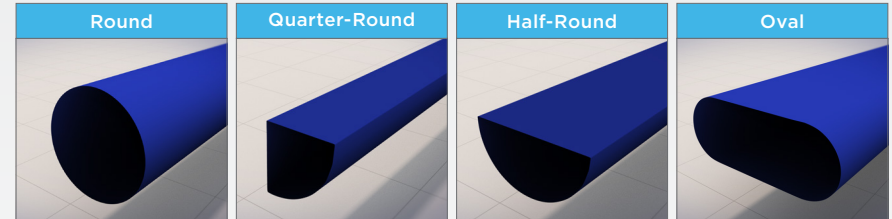

### COLOR



### SUSPENSION

WARRANTY	SkeleCore FTS	SkeleCore Pull-Tight	IHS (Hoops)	Hangers	1, 2 or 3 Row	Surface Mount
	✓	✓	✓	✓	✓	✓
	<b>20 yrs</b> Pro-rated 11-20yrs	<b>15 yrs</b> Pro-rated 11-15yrs	<b>10 yrs</b>			

\*\*See full warranty sheet for application and airflow requirements\*\*

### AIR DISPERSION

Air Porous	Linear Vents	Orifices	Grommets	Adjustable Nozzles	Fixed Nozzles
	✓	✓			