

### FABRIC

Verona™ is an all purpose, woven, air permeable, commercial grade fabric that offers best-in-class performance and features.

### FEATURES & BENEFITS

- Commonly used alternative to exposed double wall duct
- Guaranteed not to condensate
- Air is able to pass through the fabric with the airflow rate controlled by the fabric weave and the internal static pressure
- Desired airflow can be delivered exclusively through the porous fabric or combined with various venting options
- Machine washable


### FABRIC SPECIFICATIONS

Weave: Fire Retardant Polyester | Filament/Filament Twill  
 Weight: 6.8 oz/yd<sup>2</sup> (231g/m<sup>2</sup>)  
 Porosity: 2 CFM/ft<sup>2</sup> at 0.5in w.g. (10.2L/2/m<sup>2</sup> @ 125Pa)  
 Codes: Classified by Underwriters Laboratories in accordance with the requirements of:

- NFPA 90A • UL 2518 • UL-C (Canada)
- AS/NZS 1530.3-1999 (Australia / New Zealand)



### SHAPE

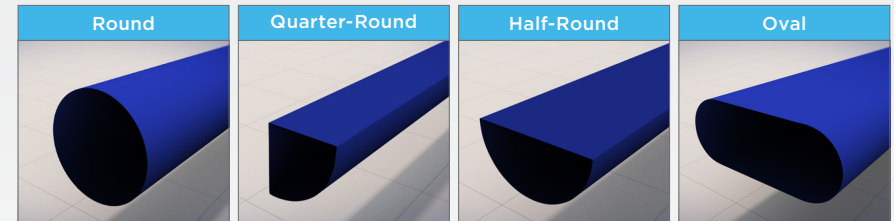

### COLOR



### SUSPENSION

WARRANTY	SkeleCore FTS	SkeleCore Pull-Tight	IHS (Hoops)	Hangers	1, 2 or 3 Row	Surface Mount
	✓	✓	✓	✓	✓	✓
	<b>15 yrs</b>	<b>10 yrs</b>			<b>10 yrs</b>	
	Pro-rated 11-15yrs				Pro-rated 8-10yrs	

\*\*See full warranty sheet for application and airflow requirements\*\*

### AIR DISPERSION

Air Porous	Linear Vents	Orifices	Grommets	Adjustable Nozzles	Fixed Nozzles
✓	✓	✓	✓	✓	✓