

### FABRIC

TufTex™ is a heavyweight, premium grade non-permeable polyester fabric. This heavy-duty fabric has a textured, aesthetically-attractive finish.

### FEATURES & BENEFITS


- Commonly used alternative to exposed single wall duct/diffusers
- No air is able to pass through the fabric weave
- Airflow is delivered through orifices and linear vents to achieve desired airflow
- Machine washable

### FABRIC SPECIFICATIONS

Weave: Fire Retardant Polyester | Plain Weave, Coated  
 Weight: 8.2 oz/yd<sup>2</sup> (278g/m<sup>2</sup>)  
 Porosity: 0.0 CFM/ft<sup>2</sup> @ 0.5" w.g. (0.0 L/s/m<sup>2</sup> @ 125 Pa)  
 Codes: Classified by Underwriters Laboratories in accordance with the requirements of:  
 • NFPA 90A • UL 2518



### SHAPE

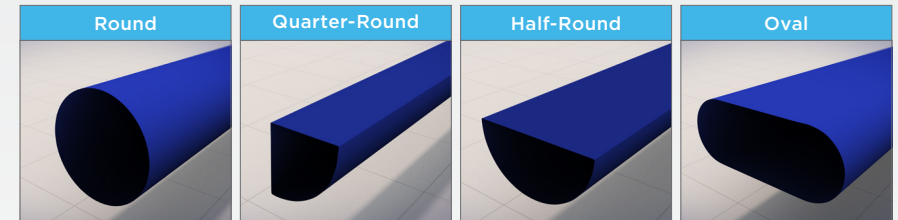

### COLOR



### SUSPENSION

| WARRANTY | SkeleCore FTS      | SkeleCore Pull-Tight | IHS (Hoops) | Hangers | 1, 2 or 3 Row | Surface Mount |
|----------|--------------------|----------------------|-------------|---------|---------------|---------------|
|          | ✓                  | ✓                    | ✓           | ✓       | ✓             | ✓             |
|          | 20 yrs             | 15 yrs               | 10 yrs      |         |               |               |
|          | Pro-rated 11-20yrs | Pro-rated 11-15yrs   |             |         |               |               |

\*\*See full warranty sheet for application and airflow requirements\*\*

### AIR DISPERSION

| Air Porous | Linear Vents | Orifices | Grommets | Adjustable Nozzles | Fixed Nozzles |
|------------|--------------|----------|----------|--------------------|---------------|
|            | ✓            | ✓        |          |                    |               |