

FABRIC

DataSox™ is a lightweight, air permeable, polyester based fabric designed for electrically-sensitive environments. It includes ESD (Electro Static Dissipative) yarns woven in a grid pattern approximately 1/4in x 1/4in to dissipate static buildup.

FEATURES & BENEFITS

- Commonly used alternative to exposed double wall duct
- Air is able to pass through the fabric with the airflow rate controlled by the fabric weave and the internal static pressure
- Desired airflow is delivered through a combination of porous fabric and adjustable nozzles
- Blended mix of fabrics that dissipates static buildup
- Machine washable


FABRIC SPECIFICATIONS

Weave: Fire Retardant Polyester | Filament, Non-Linting
 Weight: 2.9 oz/yd² (98g/m²) up to 6.3 oz/yd² (214g/m²)
 Porosity: 2.5 - 165 CFM/ft² @ 0.5in w.g. (1.2 - 78 L/s/m² @ 125Pa)
 Codes: Classified by Underwriters Laboratories in accordance with the requirements of:

- NFPA 90A • UL 2518
- UL-C (Canada)



SHAPE

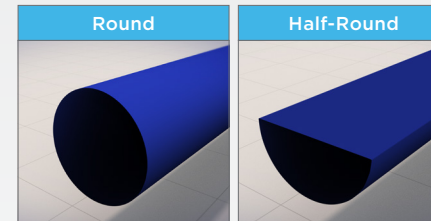

COLOR



SUSPENSION

WARRANTY	SkeleCore FTS	SkeleCore Pull-Tight	IHS (Hoops)	Hangers	1, 2 or 3 Row	Surface Mount
	N/A	N/A	N/A	✓	✓	✓

See full warranty sheet for application and airflow requirements

AIR DISPERSION

Air Porous	Linear Vents	Orifices	Grommets	Adjustable Nozzles	Fixed Nozzles
✓				✓	