

FABRIC

TufTex™ is a heavyweight, premium grade non-permeable polyester fabric. This heavy-duty fabric has a textured, aesthetically-attractive finish.

FEATURES & BENEFITS

- Commonly used alternative to exposed single wall duct/diffusers
- No air is able to pass through the fabric weave
- Airflow is delivered through orifices and linear vents to achieve desired airflow
- Machine washable


FABRIC SPECIFICATIONS

Weave: Fire Retardant Polyester | Plain Weave, Coated
 Weight: 8.2 oz/yd² (278g/m²)
 Porosity: 0.0 CFM/ft² @ 0.5" w.g. (0.0 L/s/m² @ 125 Pa)
 Codes: Classified by Underwriters Laboratories in accordance with the requirements of:

- NFPA 90A



SHAPE

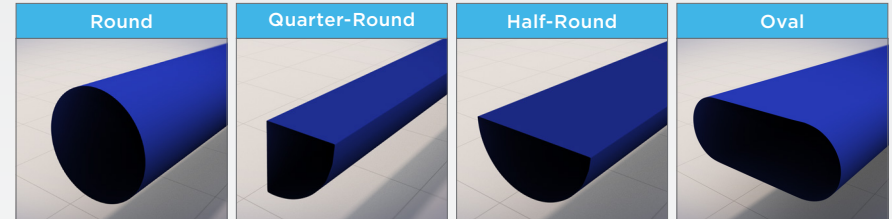

COLOR



SUSPENSION

	SkeleCore FTS	SkeleCore Pull-Tight	IHS (Hoops)	Hangers	1, 2 or 3 Row	Surface Mount
WARRANTY	✓	✓	✓	✓	✓	✓
	20 yrs	15 yrs	10 yrs			
	Pro-rated 11-20yrs	Pro-rated 11-15yrs				

See full warranty sheet for application and airflow requirements

AIR DISPERSION

Air Porous	Linear Vents	Orifices	Grommets	Adjustable Nozzles	Fixed Nozzles
	✓	✓			