

FABRIC

Stat-X™ is a lightweight, air permeable, polyester based fabric designed for electrically-sensitive environments. It includes ESD (Electro Static Dissipative) yarns woven in a grid pattern approximately 1/4in x 1/4in to dissipate static buildup.

FEATURES & BENEFITS

- Commonly used alternative to exposed double wall duct
- Guaranteed not to condensate
- Air is able to pass through the fabric with the airflow rate controlled by the fabric weave and the internal static pressure
- Desired airflow can be delivered exclusively through the porous fabric or combined with various venting options
- Dissipates static buildup
- Machine washable

FABRIC SPECIFICATIONS

Weave: Fire Retardant Polyester | Interwoven ESD Yarns

Antistatic: Static Half Life (Positive and Negative Charge) of 0.01 sec as tested to FTMS 101-4046


Weight: 2.9 oz/yd² (98g/m²)

Porosity: 2.5 CFM/ft² @ 0.5in w.g. (2.7 L/s/m² @ 125Pa)

Codes: Classified by Underwriters Laboratories in accordance with the requirements of:
 • NFPA 90A • UL 2518 • UL-C (Canada)



SHAPE

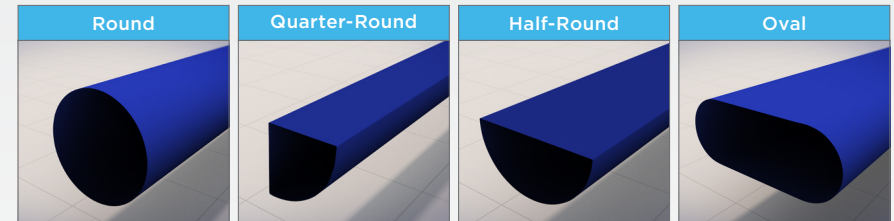

COLOR



SUSPENSION

WARRANTY	SkeleCore FTS	SkeleCore Pull-Tight	IHS (Hoops)	Hangers	1, 2 or 3 Row	Surface Mount
	✓	✓	✓	✓	✓	✓
	10 yrs Pro-rated 6-10yrs	5 yrs	5 yrs Pro-rated 2.5-5yrs			

See full warranty sheet for application and airflow requirements

AIR DISPERSION

Air Porous	Linear Vents	Orifices	Grommets	Adjustable Nozzles	Fixed Nozzles
✓	✓	✓		✓	✓