

### FABRIC

Sedona-Xm™ premium grade fabric features an active antimicrobial agent embedded in the polyester fibers during the fabric manufacturing process along with a matte finish.

### FEATURES & BENEFITS

- Commonly used alternative to exposed double wall duct
- Guaranteed not to condensate
- Air is able to pass through the fabric with the airflow rate controlled by the fabric weave and the internal static pressure
- Desired airflow can be delivered exclusively through the porous fabric or combined with various venting options
- Antimicrobial agent (up to 10 washes)
- Machine washable

### FABRIC SPECIFICATIONS

Weave: Fire Retardant Polyester | Filament/Filament Twill

Antimicrobial: EPA registered antimicrobial good up to 10 washes

Weight: 6.8 oz/yd<sup>2</sup> (231g/m<sup>2</sup>)


Porosity: 2 CFM/ft<sup>2</sup> at 0.5in w.g. (10.2L/s/m<sup>2</sup> @ 125Pa)

Codes: Classified by Underwriters Laboratories in accordance with the requirements of:

- NFPA 90A
- UL 2518



### SHAPE

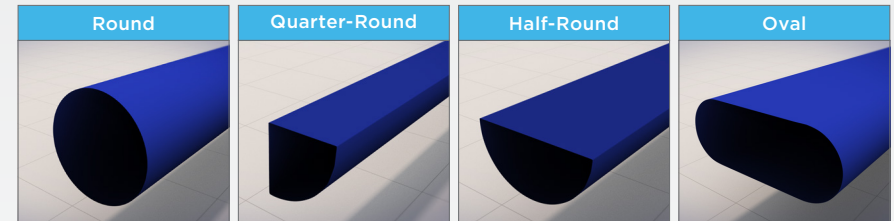

### COLOR



### SUSPENSION

WARRANTY	SkeleCore FTS	SkeleCore Pull-Tight	IHS (Hoops)	Hangers	1, 2 or 3 Row	Surface Mount
	✓	✓	✓	✓	✓	✓
	<b>20 yrs</b> Pro-rated 11-20yrs	<b>15 yrs</b> Pro-rated 11-15yrs	<b>10 yrs</b>			

\*\*See full warranty sheet for application and airflow requirements\*\*

### AIR DISPERSION

Air Porous	Linear Vents	Orifices	Grommets	Adjustable Nozzles	Fixed Nozzles
✓	✓	✓	✓	✓	✓