

SEDONA-XM NP™

Fabric Specification Sheet Air Porous

FABRIC

Sedona-Xm™ NP premium grade fabric features an active antimicrobial agent embedded in the polyester fibers during the fabric manufacturing process along with a matte finish.

FEATURES & BENEFITS

- Commonly used alternative to exposed double wall duct
- Guaranteed not to condensate
- Desired airflow can be delivered exclusively through the porous fabric or combined with various venting options
- Air is able to pass through the fabric with the airflow rate controlled by the fabric weave and the internal static pressure
- Antimicrobial agent (up to 10 washes)
- Machine washable


FABRIC SPECIFICATIONS

Weave: Fire Retardant Polyester | Filament Spun Plain
 Antimicrobial: EPA registered antimicrobial good up to 10 washes
 Weight: 6.5 oz/yd² (220g/m²)
 Porosity: 0.7 CFM/ft² at 0.5in w.g. (3.6L/2/m² @ 125Pa)
 Codes: Classified by Underwriters Laboratories in accordance with the requirements of:


- NFPA 90A • UL 2518 • UL-C (Canada)
- AS/NZS 1530.3-1999 (Australia / New Zealand)



SHAPE

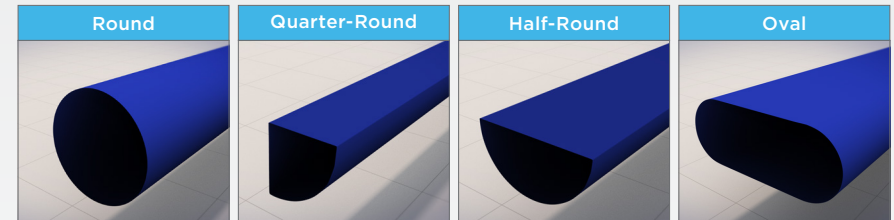

COLOR

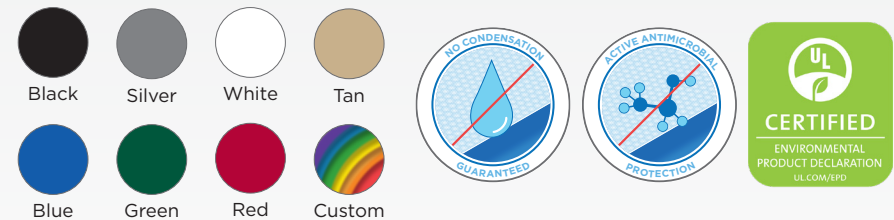

SUSPENSION

WARRANTY	SkeleCore FTS	SkeleCore Pull-Tight	IHS (Hoops)	Hangers	1, 2 or 3 Row	Surface Mount
	✓	✓	✓	✓	✓	✓
	20 yrs Pro-rated 11-20yrs	15 yrs Pro-rated 11-15yrs	10 yrs			

See full warranty sheet for application and airflow requirements

AIR DISPERSION

Air Porous	Linear Vents	Orifices	Grommets	Adjustable Nozzles	Fixed Nozzles
✓	✓	✓	✓	✓	✓