

FABRIC

DuraTex™ is a medium weight, commercial grade, non-permeable fabric. Developed as our mid-grade polyester-based fabric.

FEATURES & BENEFITS


- Commonly used alternative to exposed single wall duct/diffusers
- No air is able to pass through the fabric weave
- Airflow is delivered through orifices and various venting options to achieve desired airflow
- Machine washable

FABRIC SPECIFICATIONS

Weave: Fire Retardant Polyester | Plain Weave, Coated
 Weight: 5.5 oz/yd² (186g/m²)
 Porosity: 0.0 CFM/ft² @ 0.5" w.g. (0.0 L/s/m² @ 125 Pa)
 Codes: Classified by Underwriters Laboratories in accordance with the requirements of:
 • NFPA 90A • UL 2518
 Also available (by request only):
 • BS 5867 Part 2, 1980



SHAPE

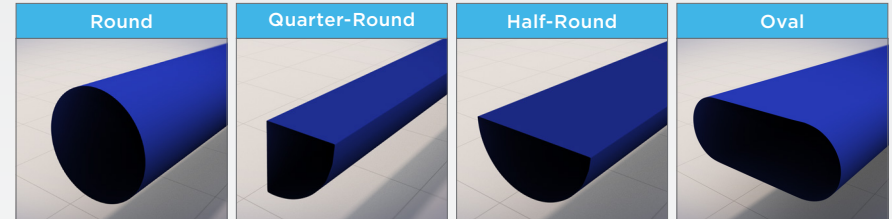

COLOR



SUSPENSION

| | SkeleCore FTS | SkeleCore Pull-Tight | IHS (Hoops) | Hangers | 1, 2 or 3 Row | Surface Mount |
|----------|--------------------|----------------------|-------------|---------|-------------------|---------------|
| WARRANTY | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 15 yrs | 10 yrs | | | 10 yrs | |
| | Pro-rated 11-15yrs | | | | Pro-rated 8-10yrs | |

See full warranty sheet for application and airflow requirements

AIR DISPERSION

| Air Porous | Linear Vents | Orifices | Grommets | Adjustable Nozzles | Fixed Nozzles |
|------------|--------------|----------|----------|--------------------|---------------|
| | ✓ | ✓ | ✓ | ✓ | ✓ |