

FABRIC

DuraTex™ is a medium weight, commercial grade, non-permeable fabric. Developed as our mid-grade polyester-based fabric.

FEATURES & BENEFITS


- Commonly used alternative to exposed single wall duct/diffusers
- No air is able to pass through the fabric weave
- Airflow is delivered through orifices and various venting options to achieve desired airflow
- Machine washable

FABRIC SPECIFICATIONS

Weave: Fire Retardant Polyester | Plain Weave, Coated
 Weight: 5.5 oz/yd² (186g/m²)
 Porosity: 0.0 CFM/ft² @ 0.5" w.g. (0.0 L/s/m² @ 125 Pa)
 Codes: Classified by Underwriters Laboratories in accordance with the requirements of:
 • NFPA 90A • UL 2518
 Also available (by request only):
 • BS 5867 Part 2, 1980



SHAPE

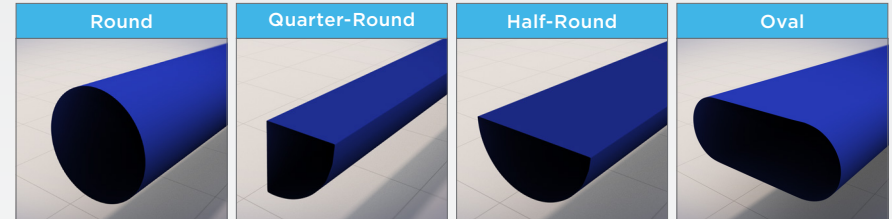

COLOR



SUSPENSION

	SkeleCore FTS	SkeleCore Pull-Tight	IHS (Hoops)	Hangers	1, 2 or 3 Row	Surface Mount
WARRANTY	✓	✓	✓	✓	✓	✓
	15 yrs	10 yrs			10 yrs	
	Pro-rated 11-20yrs				Pro-rated 8-10yrs	

See full warranty sheet for application and airflow requirements

AIR DISPERSION

Air Porous	Linear Vents	Orifices	Grommets	Adjustable Nozzles	Fixed Nozzles
	✓	✓	✓	✓	✓