
PRODUCT DATA

The F-Series diffuser was developed for freezers and can be fitted to existing or new equipment operating with frosted coils. The F-Series' design allows it to collapse when the unit goes into a heated defrost cycle. While the sleeve is down, the heat is being kept inside the unit speeding the thaw cycle time and reducing the amount of heat that would usually escape into the freezer.

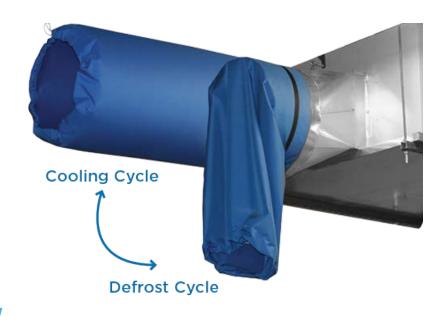

FEATURES & BENEFITS


- Low maintenance
- UL approved Air porous fabric will not condensate during operation
- Adjustable outlet eases field adjustment for lower flow conditions

- Reduced energy costs
- Helps coils thaw quicker resulting in lower defrost cycle time
- Reduces unintended product thawing in freezer



SIZING INFORMATION

Diameter	Length	
	Feet	Inches
12	2	6
14	2	9
16	3	0
18	3	3
20	3	6
22	3	9
24	4	0
26	4	3
28	4	6
30	4	9
32	5	0
34	5	3
36	5	6
38	5	9
40	6	0
42	6	3
44	6	6
46	6	9
48	7	0
50	7	3
52	7	6
54	7	9
56	8	0
58	8	3
60	8	6

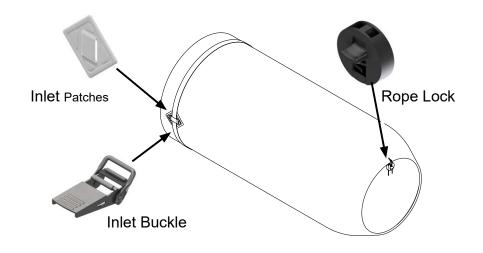

SPECIFICATIONS

WEAVE: Fire Retardant Polyester

Filament/Filament Twill

WEIGHT: 6.8oz/yd² (231g/m²⁾

POROSITY: 2 CFM/ft² at 0.5" w.g. (10.2L/s/m² @125Pa)

CODES: Classified by Underwriters

Laboratories in accordance with

the requirements of:

• NFPA 90A

• UL 2518



Patent: www.ductsox.com/patents



Phone: 563-588-5300 Toll-free: 866-382-8769

Fax: 563-588-5330



